


Godswill

Godswill Machinery


CE

# GPF SERIES

## Semi-Auto Prefeeder (Flat Bed Diecutter) 半自動送紙機 (平軋機用)

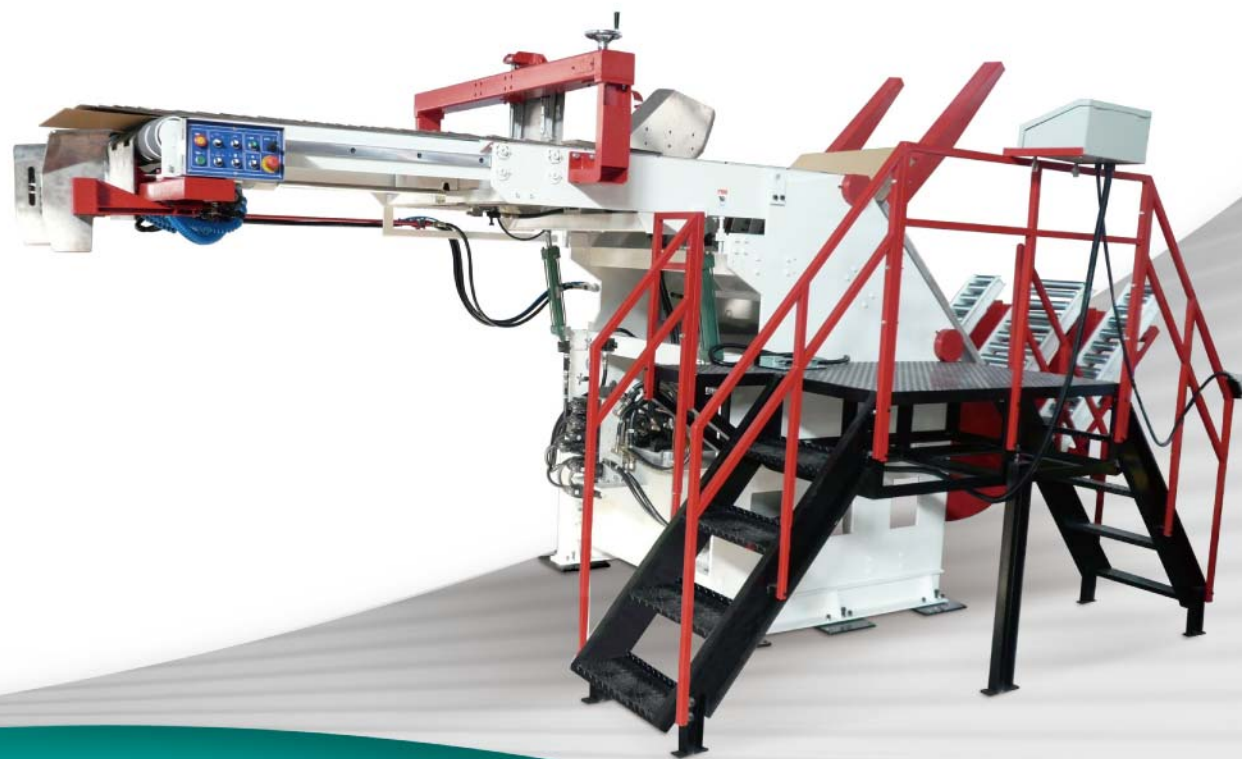

### Layout | 外型圖

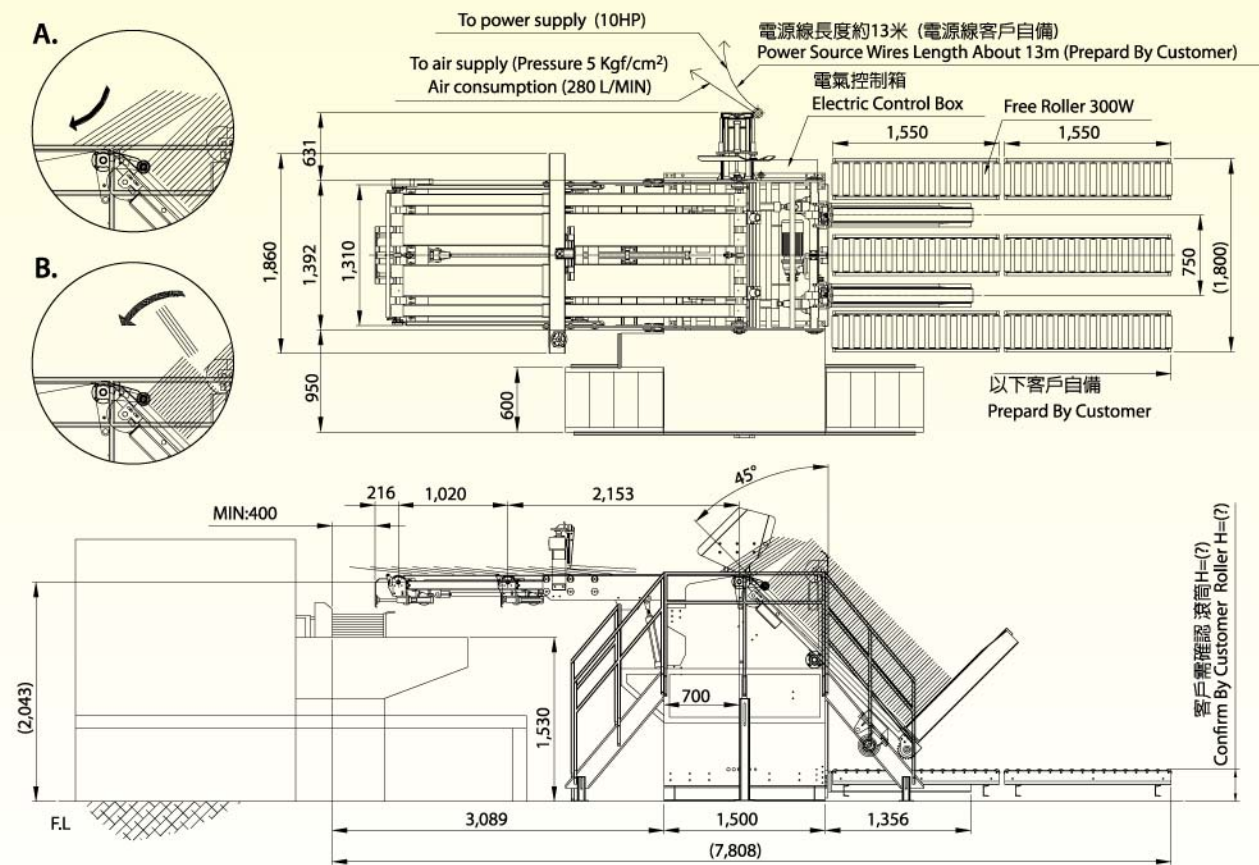

### General specifications | 一般規範

機型	Type	GPF-120(S)	GPF-145(S)	GPF-160(S)
最大送紙尺寸	Max. Sheet Size	1000 x 1200 (mm)	1000 x 1450 (mm)	1150 x 1670 (mm)
最小送紙尺寸	Min. Sheet Size	320 x 500 (mm)	360 x 540 (mm)	400 x 600 (mm)
最大載紙重量	Max. Load	1000 Kg	1000 Kg	1000 Kg
最大載紙高度	Max. Stack Height	1800 mm	1800 mm	1800 mm
最大送紙速度	Max. Capacity	150 Sheet /min	120 Sheet /min	120 Sheet /min
總動力	Power Required	10 3/4 HP	10 3/4 HP	10 3/4 HP
機械總重	M/C Weight	3600 Kg	3600 Kg	3750 Kg

※規格設計，本公司保有設計變更之權利，恕不另行通知！ Specification And Design May Be Change Without Prior Notice.

GODSWILL PAPER MACHINERY CO., LTD.

Godswill 冠裕機械股份有限公司  
裕恒機械股份有限公司  
GODSWILL PAPER MACHINERY CO., LTD.

台中市神岡區神洲北路88號  
No.88, Shenzhou N. Rd., Shengang Dist.,  
Taichung City 429, Taiwan  
TEL : 886-4-2526-8912 FAX : 886-4-2527-8683  
http://www.godswill.com.tw  
E-mail:service@godswill.com.tw  
YouTube:www.youtube.com/user/godswilltw

# GPF SERIES



## Semi-Auto Prefeeder (Flat Bed Diecutter)

### 半自動送紙機 (平軋機用)

#### Special Features | 特色

- Stretchable feeding table with assistant control box offer convenient operation.
- Hydraulic drive cylinder fork is powerful and safety.
- Side and front pneumatic jogging for sheets squaring.
- The shingle gate is operator adjustable for speed or condition of board.
- Hydraulic unit with low-noise, highly effective and less maintenance.
- Continuous type feeding.

- 伸縮皮帶台易於調整操作，副控制箱方便印刷車操作者控制。
- 油壓驅動機構，出力大動作確實且安全性高。
- 側齊紙板及後拍齊板採空壓操作，確實拍齊又不傷紙板。
- 開門式出紙可依據紙速度需求調整開口高度。
- 高效能低噪音的油壓系統故障率低。
- 瓦積式連續送紙。



Stretchable feeding table is simple to adjust and operate with assistant control box offer convenient operation.  
伸縮皮帶易於調整操作，副控制箱方便印刷車。



The tamper has electrically adjustable screw movement. Air-powered tampers are high effective and longer life.

電動螺桿移動拍齊裝置，調整容易。  
氣壓驅動拍板紙疊整齊壽命長。



Hydraulic unit with low-noise. Highly effective and less maintenance. Air-cooler be fixed inside machine body to prevent dust.

高效能低噪音的油壓系統，故障率低。  
風冷系統設置於車壁內側，有效防止紙粉塵堆積影響冷卻效果。

GPF-Series



The shingle gate is operator adjustable for speed or condition of board.

開門式出紙可依據紙速度需求調整開口高度。



Auto hook paper. 自動勾紙。



HMI operate interface is conversational to set up, and error message offer easy way for operator to do trouble shooting and maintenance.

人機操作介面，對話式設定，以及故障提示說明，易於操作及維修。

