




Recycle and make your material for a clean future
回收再利用，共創乾淨美好的未來。


Godswill has over 25 years experience in designing and manufacturing a complete range of highly efficient, Fully Automatic Horizontal Balers, Two Ram Balers and Semi-Automatic Horizontal balers along with ancillary equipment such as Bottle Perforators, Paper fluffer and feed Conveyors.

Godswill 生產各式完備的壓縮捆包機種提供多樣化的選擇，無論是從處理量到安裝空間，或針對不同類型的處理物，甚至特殊裝置設計等。我們以 25 年專業經驗超過 3000 台在全球各地運轉及堅強的設計團隊提供最佳服務。

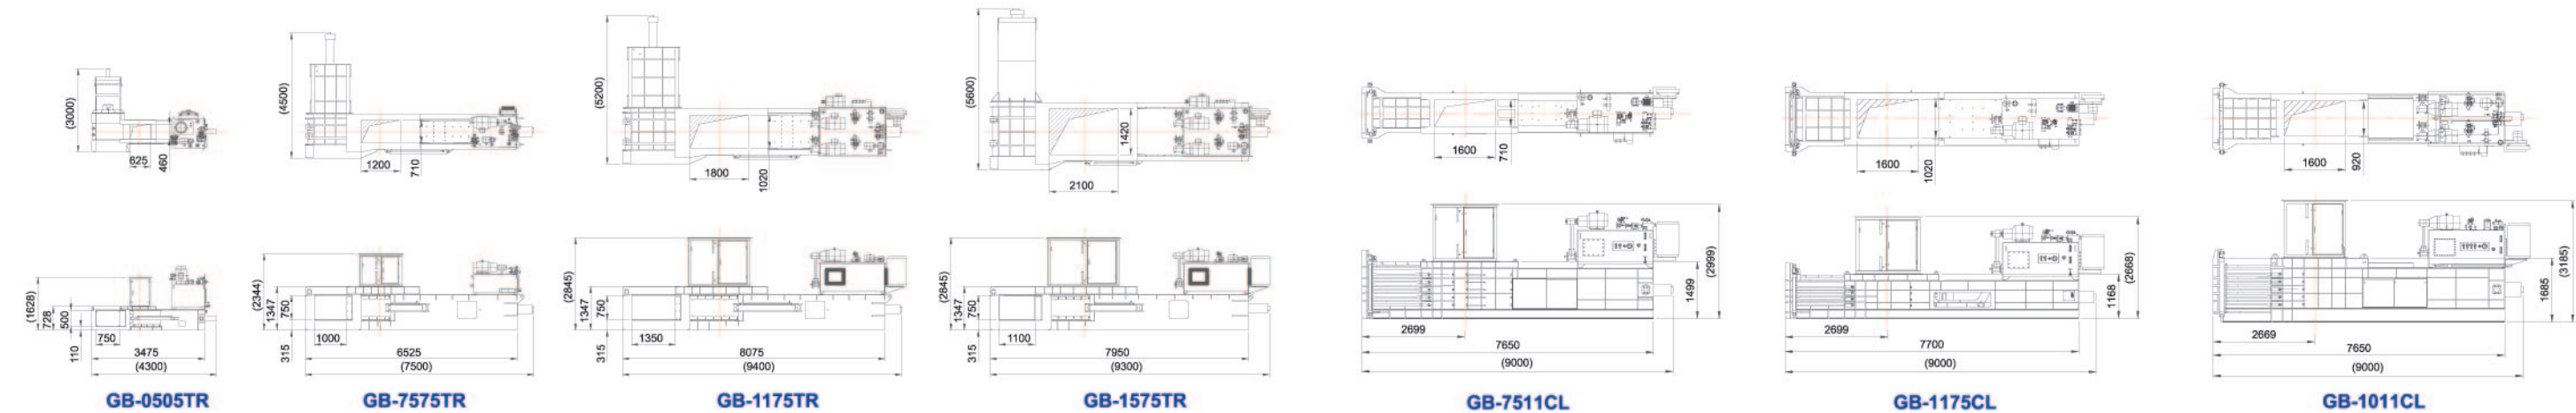

			L-TYPE TWIN RAM BALING PRESS SERIES L 型兩段式打包機												CLOSE END BALER 關口式全自動壓縮捆包機																							
Type	機 型	單 位 UNIT	GB-0505TR		GB-7575TR		GB-1175TR				GB-1575TR				GB-7511CL		GB-1175CL		GB-1011CL		GB-7575CL		GB-7511CSS		GB-1175CSS		GB-1111CSS		GB-1575CSS									
			AUTO TIE												Manual Type (Optional Auto Tie) 手動 (選配自動綁線)				Manual Type 手動																			
Main Cylinder	主壓缸	mm	D125		D200		D250		D300		D250		D300		D250		D300		D250		D180		D200		D200		D200											
Ejector Cylinder	側壓缸	mm	D100		D150		D224		D224		D224		D224		D250		D300		D250		D180		D200		D200		D200											
Horsepower	油壓動力	HP	10	20	40	60	80	120	120	180	80	120	120	180	60	40	120	40	20	20	20	20	20	20	30	30	22.5											
		K.W	7.5	15	30	45	30 x 2	45 x 2	45 x 2	45 x 3	30 x 2	45 x 2	45 x 2	45 x 3	45	30	45 x 2	30	15	15	15	15	15	15	22.5	22.5												
Feed Opening Dimensions (L x W)	入料口尺寸	mm	625 x 460		1200 x 710		1800 x 1020				2100 x 1420				1600 x 710		1600 x 1020		1600 x 920		800 x 710		1600 x 770		1600 x 1120		1800 x 1120		900 x 1470									
Bale Chamber (H x W x L)	料室尺寸	mm	500 x 500 x 1675		750 x 750 x 2650		750 x 1100 x 3550				750 x 1500 x 3550				1100 x 750 x 3200		750 x 1100 x 3200		1100 x 1000 x 3200		750 x 750 x 2200		1100 x 750 x 3200		750 x 1100 x 3200		1100 x 1100 x 3500		750 x 1500 x 2000									
Bale Dimensions (H x W x L)	捆包尺寸	mm	500 x 500 x 750		750 x 750 x 1000		750 x 1100 x 1400				750 x 1500 x 1100				1100 x 750 x 1400 (Max.)		750 x 1100 x 1400 (Max.)		1100 x 1000 x 1400 (Max.)		750 x 750 x 1400 (Max.)		1100 x 750 x 1600 (Max.)		750 x 1100 x 1600 (Max.)		1100 x 1100 x 1600 (Max.)		750 x 1500 x 1200 (Max.)									
Production (Occ Basic)	處理量	TPH	1~1.5 (Fine Paper)		1.5~2.5 (Fine Paper)		3.5~5		8~12		10~15		15~20		10~15		15~20		13~17		17~22		13~17		17~22		2~3		1.5~2.5									
Max.Thrust Force 最大出力		Ton	21 Ton (175 kg/cm²)		65 (210 kg/cm²)		118 (240 kg/cm²)				170 (240 kg/cm²)				118 (240 kg/cm²)		170 (240 kg/cm²)		118 (240 kg/cm²)		170 (240 kg/cm²)		118 (240 kg/cm²)		53 (210 kg/cm²)		65 (210 kg/cm²)		65 (210 kg/cm²)		65 (210 kg/cm²)							
Normal Unit Force	最大單位面壓	kg/cm²	8.4		11.7		14.3				20.6				10.4				15				14.3		14.3		15.4		20.8		6.4		8		5.3		5.8	
Cycle Time (Un-load) (60Hz & 1800 rpm)	單循環時間	sec.	23.1	11.5	15.3	19.5	14.2	9.7	14	9.4	14.2	9.7	14	9.4	19.5	28.4	14	22	34.2	45	49.2	28	45	49.2	28	45	49.2	28	45	49.2								
O.C.C		kg/m³	-	-	400 ~ 500	500 ~ 600	680 ~ 780	500 ~ 600	680 ~ 780	500 ~ 600	680 ~ 780	500 ~ 600	680 ~ 780	500 ~ 600	680 ~ 780	500 ~ 600	680 ~ 780	-	-	400 ~ 500	400 ~ 500	400 ~ 500	400 ~ 500	400 ~ 500	400 ~ 500	400 ~ 500	400 ~ 500	400 ~ 500	400 ~ 500	400 ~ 500								
Alum. Can	鋁罐	kg/m³	-	-	300 ~ 400	350 ~ 450	420 ~ 540	350 ~ 450	420 ~ 540	350 ~ 450	420 ~ 540	350 ~ 450	420 ~ 540	350 ~ 450	420 ~ 540	350 ~ 450	420 ~ 540	420 ~ 540	-	-	-	-	-	-	-	-	-	-	-	-	-							
Tin Cans	鐵罐	kg/m³	-	-	450 ~ 600	550 ~ 720	660 ~ 860	550 ~ 720	660 ~ 860	550 ~ 720	660 ~ 860	550 ~ 720	660 ~ 860	550 ~ 720	660 ~ 860	550 ~ 720	660 ~ 860	680 ~ 720	-	-	-	-	-	-	-	-	-	-	-	-	-							
Pet		kg/m³	-	-	300 ~ 380	380 ~ 450	450 ~ 540	380 ~ 450	450 ~ 540	380 ~ 450	450 ~ 540	380 ~ 450	450 ~ 540	380 ~ 450	450 ~ 540	380 ~ 450	450 ~ 540	-	-	-	-	-	-	-	-	-	-	-	-	-	-							
Hdpe		kg/m³	-	-	360 ~ 480	450 ~ 600	540 ~ 720	450 ~ 600	540 ~ 720	450 ~ 600	540 ~ 720	450 ~ 600	540 ~ 720	450 ~ 600	540 ~ 720	450 ~ 600	540 ~ 720	-	-	-	-	-	-	-	-	-	-	-	-	-	-							
Plastic Film	薄膜	kg/m³	-	-	360 ~ 440	450 ~ 550	540 ~ 660	450 ~ 550	540 ~ 660	450 ~ 550	540 ~ 660	450 ~ 550	540 ~ 660	450 ~ 550	540 ~ 660	450 ~ 550	540 ~ 660	-	-	260 ~ 350	260 ~ 350	260 ~ 350	260 ~ 350	260 ~ 350	260 ~ 350	260 ~ 350	260 ~ 350	260 ~ 350	260 ~ 350	260 ~ 350								
Number Of Ties	打包線數	tie	Can be programmed to apply extra wires . 依需求設定綁線數												5	4	5	4	5	4	5	4	5	4	5	4	5	4	5	4								
Wire Size	線徑	mm	15 (P.P 帶 P.P BAND)												2.657 OR 3.05 (GAUGE 12 OR 11)												3.5~4.0											
Machine Weight	機械重量	Ton	3	3.5	12	23	24	25	26	27	25	26	27	28	15	15	22	11	7.5	8.5	9	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5							

* Specifications And Design May Be Change Without Prior Notice. 產品規格設計，本公司保有變更之權力，恕不另行通知！

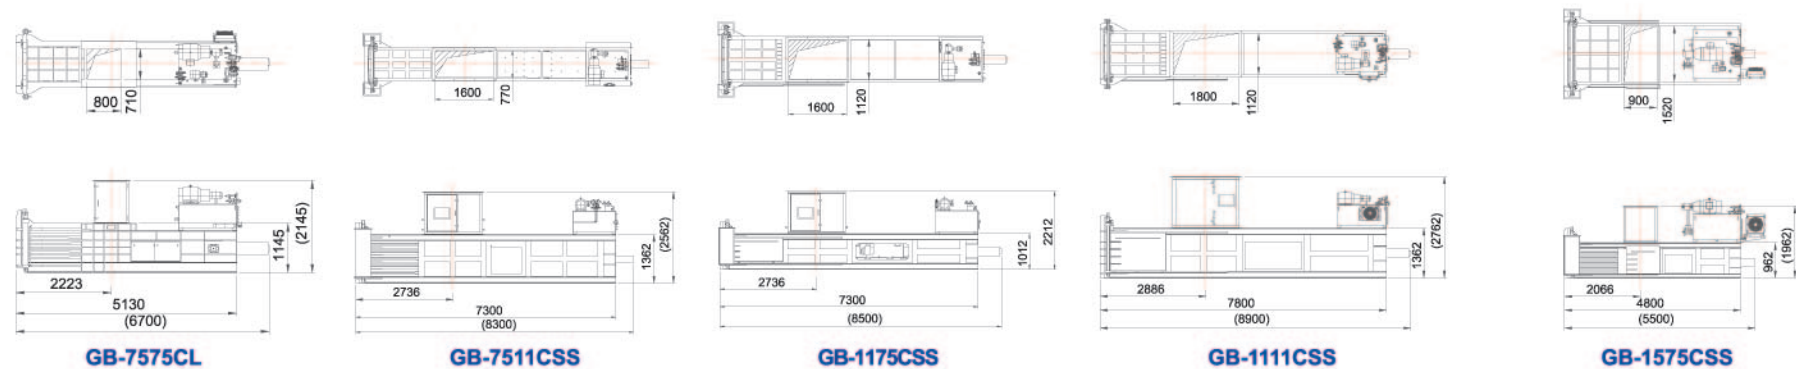

冠裕 機械股份有限公司
GODSWILL PAPER MACHINERY CO., LTD.

429 台中市神岡區神洲北路 88 號
No. 88, Shengzhou N. Rd., Shengang Dist., Taichung City 429, Taiwan (R.O.C.)
TEL : +886-4-2526-8912 FAX : +886-4-2527-8683
http:// www.godswill.com.tw E-mail : service@godswill.com.tw
YouTube : www.youtube.com/user/godswilltw

GB-TR series

Godwill baling presses provide an economical and ecological solution where waste material is compressed into compact bales which can be easily stored and transported back to the recycling company.

自動壓縮捆包作業為環保回收的起始站，同時是最經濟的處理策略，物質經由壓縮捆包後容易儲存堆放及降低運輸成本。



GB-TR Series Balers

The Godwill range of two ram balers provides the latest industry developments to the professional recycler at an economical price. The two ram baler not only achieves maximum weight but it can also bale many different materials including OCC, plastic film, HDPE, PET, steel cans, aluminum cans and hard plastics

Other Options include

Removable Hardox 400 wear plates. (Opt.)



Conveyor (Opt.)
輸送機 (選購)



De-Blocker (Opt.)
過切裝置 (選購)



Hydraulic Hopper Opening Reducer (Opt.)
可變料口選擇 (選購)

GB-TR 系列

L型兩段式打包機屬專業回收處理設備，不僅可獲得最大的打包重量，同時也適用於多種材質的理想選擇，包含各式紙類紙箱、塑膠薄膜、HDPE、PET、鐵罐、鋁罐、各種不同材質等等...且搭配自動綁線機構系統來快速捆包。

此機台可搭配選配如下

料室四面內側襯板及軌道皆採用替換式高效能耐磨鋼 HARDOX 400 以上 (選購)。



Accent 470 wire tying system can be programmed to apply extra wires on difficult material.

綁線模式
可自行設定綁線數及設定線的間距。



HMI - Human Machine Interface allows operators to monitor or adjust the machine parameters for different materials as well as troubleshoot problems.

專業回收用人機面板，可依不同回收材料特性設定不同參數操作模式，更換材料時只需切換操作模式，即可變換最佳化的設定值。



Simple - Robust hydraulic chamber side door ensures square - solid bales and easy 開門機構採用油壓裝置系統，出力大、動作確實。



Unique drop down end door provides easy access for the main ram maintenance and a quick and easy solution if a blockage occurs.

側推料室側門易於小車維修，採用特殊焊接工法強度近乎完美，且可確保承受強大擠壓壓力。

GB-C series

CLOSE END AUTOMATIC BALING PRESS 關口式全自動壓縮捆包機

It is professional baling press for recycle the plastic. It also can bale paper and aluminum cans.

此機種為塑膠類回收專用機種，同時也可以壓縮紙類及鋁罐。



Heavy-duty rollers install on top and bottom of Ram to bear huge force, double sides have rollers to less wear of wall. All are with designing easy to lubricate and simple replace.

擠壓車上下皆設有重負荷滾輪，承受切斷時產生的轉矩，並設置兩側滾輪減少車壁磨擦。特殊設計易於潤滑及更換維修。



Exclusive auto-tier system
Increases speed of bale tying.
The simpler structure is optimum for less maintenance and easy cleaning. (Opt.)

獨特的自動捆包裝置速度快，結構簡單動作確實，故障率低且易於清潔保養 (選購)。



Perforator for plastic bottle increase bale weight efficiently. (Opt.)

破瓶機可以有效地提升寶特瓶的打包重量 (選購)。