

Godswill



Godswill Machinery



GAFT SERIES

TOP Full Auto Prefeeder


上印式全自動送紙機



Machine Size 機械外型尺寸

機型 Type	A	B	C	D	E	F	G	H	I	J	K	L
GAFT-6	11069	5556	2933	1200	1750	3485	190	2854	2661	1874	1694	2385
GAFT-7	11099	5586	2933	1200	1750	3485	220	3154	2961	1874	1694	2535
GAFT-8	12329	6116	2933	1600	2000	3735	250	3454	3261	2224	2044	2685
GAFT-9	12979	6166	3183	1800	2000	3735	300	3754	3561	2514	2330	2835
GAFT-10	13179	6166	3383	1800	2000	3735	300	4054	3861	2514	2330	2985
GAFT-12	14361	6231	3500	2400	2000	3735	365	4654	4461	3244	3060	3285
GAFT-15	16231	7231	3800	2700	2500	4235	600	5554	4911	4230	3950	3735

※規格設計，本公司保有變更之權利，恕不另行通知！ Specifications And Design May Be Change Without Prior Notice.

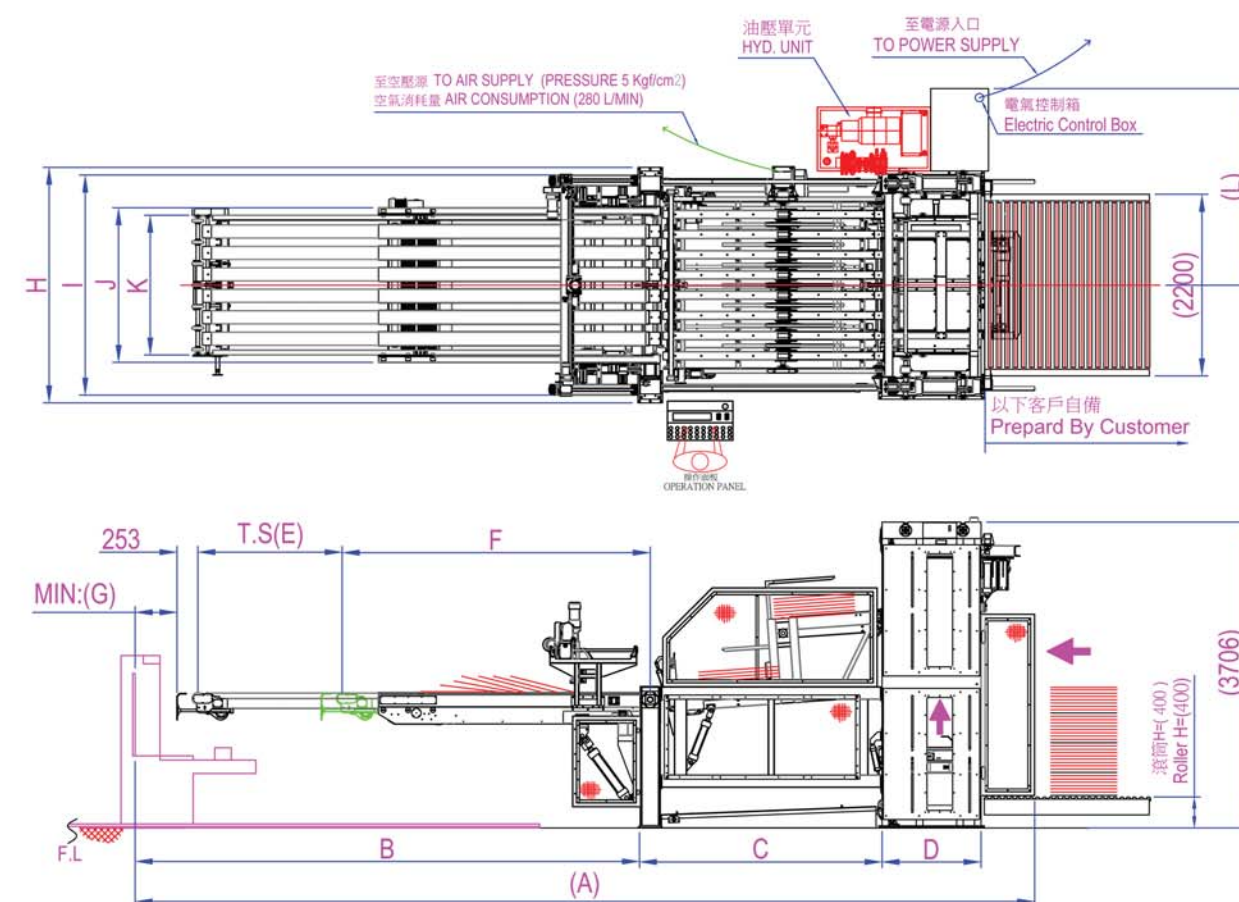

Specifications 規格表

機型 Type	GAFT-6	GAFT-7	GAFT-8	GAFT-9	GAFT-10	GAFT-12	GAFT-15
最大送紙尺寸 Max. Sheet Size	900X1800 (mm)	1000X2200 (mm)	1200X2500 (mm)	1500X2800 (mm)	1600X3000 (mm)	1600X3600 (mm)	2000X4500 (mm)
最小送紙尺寸 Min. Sheet Size	190X350 (mm)	220X500 (mm)	250X560 (mm)	300X600 (mm)	300X600 (mm)	365X650 (mm)	600X850 (mm)
最大載紙重量 Max. Load	1600 Kg	1600 Kg	1600 Kg	1600 Kg	1800 Kg	2000 Kg	2000 Kg
最大載紙高度 Max. Stack Height	1800 mm	1800 mm	1800 mm	1800 mm	1800 mm	1800 mm	1800 mm
最大送紙速度 Max. Capacity	400 Sheet /min	380 Sheet /min	350 Sheet /min	330 Sheet /min	300 Sheet /min	200 Sheet /min	160 Sheet /min
總動力 Power Required	32 HP	32 HP	32 HP	33 HP	33 HP	36 HP	40 HP
機械總重 M/C Weight	9500 Kg	10000 Kg	10800 Kg	11500 Kg	12500 Kg	13200 Kg	13900 Kg

Godswill 冠裕機械股份有限公司
裕桓機械股份有限公司

GODSWILL PAPER MACHINERY CO., LTD.

台中市神岡區神洲北路88號
No.88, Shenzhou N. Rd., Shengang Dist.,
Taichung City 429, Taiwan (R.O.C.)
TEL: 886-4-25268912 FAX: 886-4-25278683
Email: service@godswill.com.tw
http://www.godswill.com.tw

GODSWILL PAPER MACHINERY CO., LTD.

GAFT GAFT GAFT GAFT GAFT GAFT GAFT

GAFT SERIES

TOP Full Auto Prefeeder

▶▶ 上印式全自動送紙機



GAFT SERIES



Increase productivity & Decrease Manpower

Professional designing for Flexo

Platen Die Cutter

Auto Stitching

Special Features 特點

- HYDRAULIC DRIVE CYLINDER IS POWERFUL AND SAFETY.
- SIDE AND FRONT PNEUMATIC JOGGING FOR SHEETS SQUARING.
- THE SHINGLE GATE IS OPERATOR ADJUSTABLE FOR SPEED OR CONDITION OF BOARD.
- CONTINUOUS TYPE FEEDING, SEND THE CONTINUOUS FEW PAPER TO FLEXO, AND EXTEND THE LIFE OF FEED ROLLER.
- HYDRAULIC SET WITH LOW-NOISE, HIGHLY EFFECTIVE AND LESS MAINTENANCE.
- PREFEEDER BELT SPEED DEPEND ON THE FLEXO CAN BE ADJUSTABLE.
- STRETCHABLE FEEDING TABLE WITH ASSISTANT CONTROL BOX OFFER CONVENIENT OPERATION.

- 油壓驅動機構，出力大動作確實且安全性高。
- 側齊紙板及後拍齊板採空壓操作，確實拍齊又不傷紙板。
- 開門式出紙可依據紙速度需求調整開門高度。
- 瓦楞式連續送紙，至印刷機送紙部單張或少量下紙，延長印刷機送紙輪壽命。
- 高效能低噪音的油壓系統故障率低。
- 皮帶速度可依印刷機速度；無段調整。
- 電動伸縮皮帶易於調整操作，副控箱方便印車操作者控制。



Gate 開門



Flip Device 翻轉器



Pusher 推紙器



- ▲ Hydraulic set with low-noise, highly effective and less main-tenance.
- ▲ 高效能低噪音的油壓系統，故障率低。



Adjust stack center cylinder
紙疊校正缸

- ▲ All operation functions are controlled through a programmable logic controller. The machine has been passed CE safety measure identification.
- ▲ 電控系統經由PLC可程式控制器控制系統，穩定檢修容易。歐規CE安全認證通過，安全性優越。

- ▲ HMI operate interface is conversation to set up, and error message offer easy way for operator to do trouble shooting and maintenance.
- ▲ 人機操作介面，對話式設定，以及故障提示說明，易於操作及維修。

